



EGE-120P-36

POLYCRYSTALLINE PHOTOVOLTAIC MODULE



4 busbars cells, with efficiency up to 18.8 %.



IP65 junction box for long term weather endurance.




High quality aluminum frame, resisting load up to 5400 Pa and wind pressure up to 2400 Pa.




High transmissivity, low-iron tempered glass.



Engineering drawings

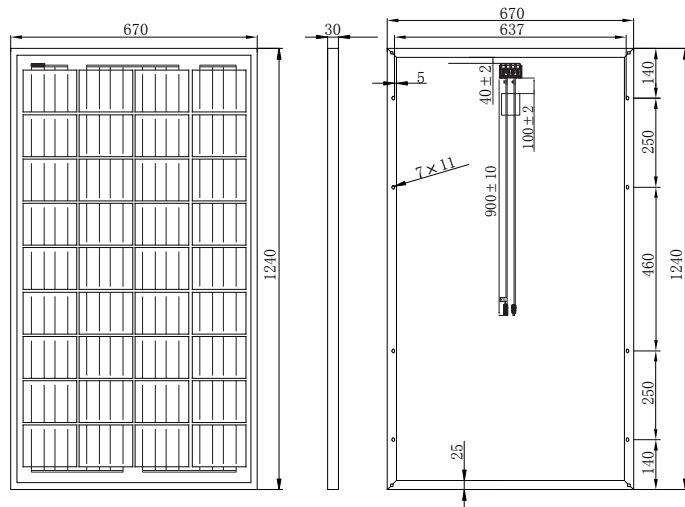

IV curves

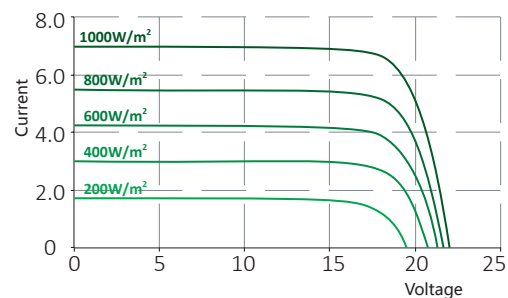

Temperature characteristics

NOCT	45 °C ±2 °C
Temperature coefficient of Pmax	-0.41 %/°C
Temperature coefficient of Voc	-0.31 %/°C
Temperature coefficient of Isc	+0.06 %/°C

Electrical characteristics at STC*

Power output (Pmax)	120 W
Power output tolerance	0~3 %
Panel efficiency	14.44 %
Maximum power voltage (Vmp)	18.38 V
Maximum power current (Imp)	6.53 A
Open circuit voltage (Voc)	22.48 V
Short circuit current (Isc)	7.05 A

*Standard test conditions:
irradiance: 1000 W/m² • cell temperature: 25 °C • AM: 1.5

General characteristics

Cell type	Polycrystalline (156×125 mm)
Number of cells	36
Dimensions	1240×670×30 mm
Weight	9.0 kg
Glass	3.2 mm tempered glass
Frame	Anodized aluminium alloy
Junction box	IP65
Cable	0.9 m
Connector	MC4 or MC4 compatible

Electrical characteristics at NOCT*

Power output (Pmax)	89 W
Maximum power voltage (Vmp)	16.98 V
Maximum power current (Imp)	5.22 A
Open circuit voltage (Voc)	20.87 V
Short circuit current (Isc)	5.72 A

*Nominal operating cell temperature:
irradiance: 800 W/m² • ambient temperature: 20 °C • AM: 1.5 • wind speed: 1 m/s

Packaging

Per box	2 pcs
Per 20ft GP container	850 pcs
Per 40ft GP container	1700 pcs
Per 40ft HQ container	2000 pcs

Operating conditions

Operating temperature range	-45 °C ~ +85 °C
Max system voltage	1000 V
Max series fuse rating	10 A
Max front load (ex: snow)	5400 Pa
Max back load (ex: wind)	2400 Pa

Certification

